

WatchGuard[®] XTM 21, 22, 23

WITH A NEXT-GENERATION WATCHGUARD XTM 21, 22, OR 23 APPLIANCE, YOUR NETWORK IS:

RECOMMENDED FOR SMALL BUSINESSES, REMOTE OFFICES, AND WIRELESS HOTSPOTS

WatchGuard XTM 2 Series appliances deliver a new class of performance-driven security. Network protection is stronger than ever, with full HTTPS inspection, VoIP support, and optional application control. All models have three 1-Gigabit Ethernet ports for faster link speeds, and optional wireless capabilities include dual-band 802.11n technology for greater wireless speed and responsiveness.

An XTM 2 Series appliance can be used as a stand-alone security solution for a small business, and makes an ideal endpoint for connecting a secure VPN tunnel back to a WatchGuard XTM or WatchGuard Firebox network.

“We made the decision to go with WatchGuard because one appliance would give us all the security, control, reporting, and visibility we needed.”

*Justin Brake
Manager of IT Services
Wireless Express*

SECURE

- Application-layer content inspection identifies & blocks threats that stateful packet firewalls can't detect.
- Wide-ranging proxy protection provides robust security on HTTP/HTTPS, FTP, SMTP, POP3, DNS, TCP/UDP.
- Security subscriptions boost protection in critical attack areas for complete unified threat management: blocking spam, controlling dangerous web surfing, preventing network intrusions, and stopping viruses, spyware, and other malware at the gateway.
- Optional Application Control keeps unproductive and dangerous applications off-limits.

EFFICIENT

- Interactive, real-time monitoring and reporting – at no extra charge – give an unprecedented view into network security activity, so you can take immediate preventive or corrective actions.
- Intuitive management console centralizes configurations and streamlines remote management.
- Three 1-GbE interfaces allow faster link speeds, which is particularly useful for trusted LAN.
- Drag-and-drop Branch Office VPN setup – three clicks and your remote office is connected.

FLEXIBLE

- Call setup security for VoIP means you don't need to “wire around the firewall” to take advantage of the big cost savings that VoIP can generate.
- WAN and VPN failover increase performance, redundancy, and reliability.
- Multiple VPN choices deliver flexibility in remote access. Includes IPSec, SSL, and support for iOS devices such as iPhone, iPad, and iPod touch.
- Advanced networking features, like transparent bridge mode and dynamic routing support, allow you to add security without needing to change existing network infrastructure.

WIRED OR WIRELESS – YOUR CHOICE

- Wireless models include optional dual-band 802.11n technology for much more responsive wireless network connection and expanded range. Allows users to access 2.4 GHz or less crowded 5 GHz band.
- Three distinct security zones give administrators precise control over Internet access privileges for different user groups.
- Wireless guest services segment the Internet for customers/guests.

CAPABLE

- Multi-layered, interlocking security protects the network.
- Secure remote connectivity keeps mobile workforce productive.
- Intuitive, centralized management gives you the control you need to manage efficiently.
- Choice of wired or wireless models to suit your specific business requirements.
- Monitoring and reporting tools, included at no extra cost, support industry and regulatory compliance, with drill-down functions that make it easy to pinpoint specific activities.



XTM 2 Series	XTM 21/21-W	XTM 22/22-W	XTM 23/23-W
THROUGHPUT & CONNECTIONS			
Firewall throughput*	110 Mbps	150 Mbps	195 Mbps
VPN throughput*	35 Mbps	55 Mbps	55 Mbps
XTM throughput*	18 Mbps	30 Mbps	40 Mbps
Interfaces 10/100	3 copper	3 copper	3 copper
Interfaces 10/100/1000	3 copper	3 copper	3 copper
I/O interfaces	2 USB	2 USB	2 USB
Nodes supported (LAN IPs)	Unrestricted	Unrestricted	Unrestricted
Concurrent connections (bi-directional)	10,000	20,000	30,000
Local user auth. DB limit	100	200	200
Model upgradeable	Yes	Yes	No
Wireless Available	802.11a/b/g/n	802.11a/b/g/n	802.11a/b/g/n
VPN TUNNELS (INCL/MAX)			
Branch Office VPN	5	20	50
Mobile VPN IPSec	1/11	5/25	5/55
Mobile VPN SSL	1/11	1/25	55/55

SECURITY FEATURES	
Firewall	Stateful packet inspection, deep application inspection, application proxies
Application proxies	HTTP, HTTPS, SMTP, FTP, DNS, TCP, POP3
Threat protection	Blocks spyware, DoS attacks, fragmented & malformed packets, blended threats, and more
VoIP	H.323, SIP, call setup and session security
Security Subscriptions	Application Control, WebBlocker, spamBlocker, Gateway AntiVirus, Intrusion Prevention, Reputation Enabled Defense

VPN & AUTHENTICATION	
Encryption	DES, 3DES, AES 128-, 192-, 256-bit
IPSec	SHA-1, IKE pre-shared key, 3rd party cert
VPN failover	Yes
SSL	Thin client, Web exchange
PPTP	Server and Passthrough
Single sign-on	Transparent Active Directory Authentication
XAUTH	Radius, LDAP, Windows Active Directory
Other user authentication	VASCO, RSA SecurID, web-based, local 802.1X for XTM 2 Series wireless

MANAGEMENT	
Management platform	WatchGuard System Manager (WSM)
Alarms and notifications	SNMP v2/v3, Email, Management System Alert
Server support	Logging and Reporting with Server Health status, Quarantine, WebBlocker, Management
Web UI	Supports Windows, Mac, Linux, and Solaris OS
Command Line Interface	Includes direct connect and scripting

STANDARD NETWORKING	
QoS	8 priority queues, DiffServ, modified strict queuing
IP Address Assignment	Static, DynDNS, PPPoE, DHCP (server, client, relay)
NAT	Static, dynamic, 1:1, IPSec traversal, policy-based

CERTIFICATIONS	
Security	ICSA VPN, FIPS 140-2 (EAL4+ in progress)
Safety	NRTL/C, CB
Network	IPv6 Ready Gold (routing)
Hazardous Substance Control	WEEE, RoHS, REACH

SUPPORT & MAINTENANCE	
LiveSecurity® Service	Hardware warranty, 12/5 technical support with 4-hour response time, software updates, threat alerts Initial 90-day or 1-year, 2-year, and 3-year subscriptions available


Networking	Fireware® XTM	Fireware XTM Pro**
Routing	Static	Dynamic (BGP4, OSPF, RIP v1/2), Policy-based
SSL	1 SSL tunnel available	Maximum number of SSL tunnels available
VLAN support	20	50
Other Features	Port Independence Transparent/drop-in mode	Multi-WAN failover Multi-WAN load balancing

DIMENSIONS AND POWER

Product Dimensions - Wired	6.1" x 7.5" x 1.25" (15.5 x 19.0 x 3.2 cm)
Product Dimensions - Wireless (antennae up)	7.75" x 10.75" x 5" (19.7 x 27.3 x 12.7 cm)
Shipping Dimensions	10.75" x 13.25" x 3.4" (27.3 x 33.7 x 8.6 cm)
Shipping Weight - Wired	3.2 lbs (1.45 Kg)
Shipping Weight - Wireless	3.6 lbs (1.6 Kg)
AC Power	100-240 VAC Autosensing
Power Consumption - Wired	U.S. 23.33 Watts (80 BTU/hr)
Power Consumption - Wireless	U.S. 24.0 Watts (82 BTU/hr)
Rack Mountable	No (wall mount bracket included)

ENVIRONMENT

	OPERATING	STORAGE
Temperature	32° F to 104° F 0° C to 40° C	-40° F to 158° F -40° C to 70° C
Relative Humidity	10% to 85% non-condensing	10% to 95% non-condensing
Altitude	0 to 9,843 ft @ 95° F (3,000 m @ 35° C)	0 to 15,000 ft @ 95° F (4,570 m @ 35° C)
	WIRED	WIRELESS
MTBF	129,955 hours @ 104° F (40° C)	103,612 hours @ 104° F (40° C)

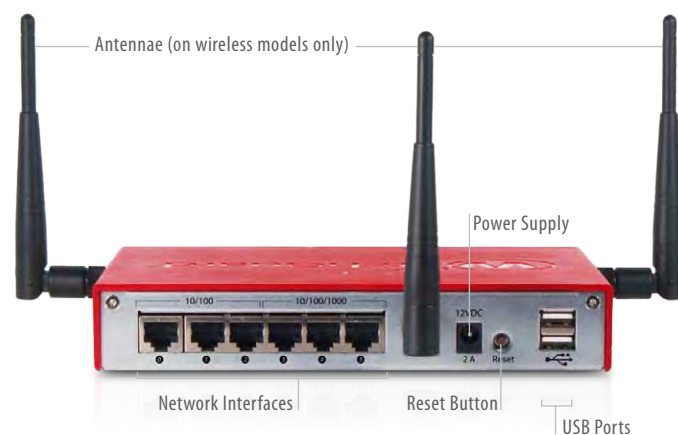

BUY THE BUNDLE AND GET THE WORKS!

Get everything you need for complete unified threat management at a great price with the Security Bundle. Includes choice of any 2 Series appliance (wired or wireless), plus Application Control, WebBlocker, spamBlocker, Gateway AntiVirus, Reputation Enabled Defense, Intrusion Prevention Service, and LiveSecurity Service for support and maintenance.

*Throughput rates will vary based on environment and configuration. Contact your authorized WatchGuard reseller or call WatchGuard directly (1.800.734.9905) for help determining the right model for your network.
**Fireware XTM Pro advanced OS is standard on XTM 23 and 23-W, and is a purchase upgrade for all other 2 Series models.

